

(12) United States Patent Satoh

US 6,556,365 B2 (10) Patent No.: Apr. 29, 2003 (45) Date of Patent:

(54) STORAGE MEDIA HAVING A WIDE SERVO BAND AND HIGH DATA FORMAT EFFICIENCY AND A STORAGE USING THE SAME

360/78.14, 135, 46

References Cited

(75) Inventor: Naoki Satoh, Odawara (JP)

(56)U.S. PATENT DOCUMENTS

(73) Assignee: Hitachi, Ltd., Tokyo (JP)

5,748,401 A * 5/1998 Kawai 360/78.14 5,784,219 A 7/1998 Genheimer 6,031,683 A • 2/2000 Iverson et al. 360/78.04

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: 10/216,726

May 18, 1999

JΡ 5-303834 11/1996 JP 10-162511 6/1998 JP 10-255257 9/1998 KR 97-67221 10/1997

Aug. 13, 2002 (22) Filed: (65)**Prior Publication Data**

* cited by examiner

US 2002/0191318 A1 Dec. 19, 2002

Primary Examiner—Alan T. Faber (74) Attorney, Agent, or Firm-Antonelli, Terry, Stout & Kraus, LLP

Related U.S. Application Data

ABSTRACT

(63) Continuation of application No. 09/572,402, filed on May 16, 2000, now Pat. No. 6,469,853.

(JP) 11-136762


A servo control method for a storage media includes arranging a plurality of servo sectors along a circumferential direction of the disk-type storage medium without successively arranging the plurality of servo sectors in a radial direction and arranging a plurality of data sectors which are

(30)Foreign Application Priority Data

not split by the servo sectors.

Nov. 1, 1999 (JP) 11-311275 (51) Int. Cl.⁷ G11B 5/09 360/49; 360/135

15 Claims, 10 Drawing Sheets

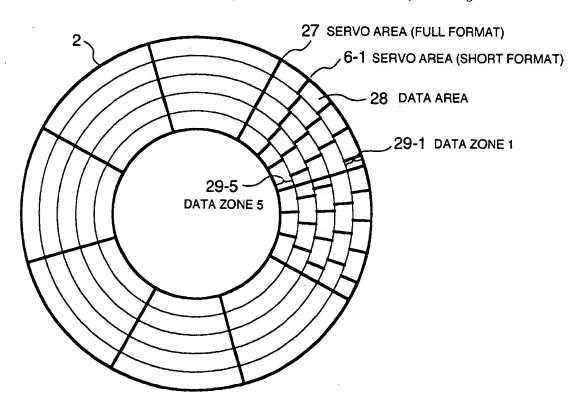

05/05/2004, EAST Version: 1.4.1